


RH

Control plug valve

DIN-EN: DN 15 – 600 / PN 10 – 40

ASME: NPS ½" – 24" / class 150

Einsatzbereich: $-30 < T < 230/280^{\circ}\text{C}$, Vakuum 10-8 mbar

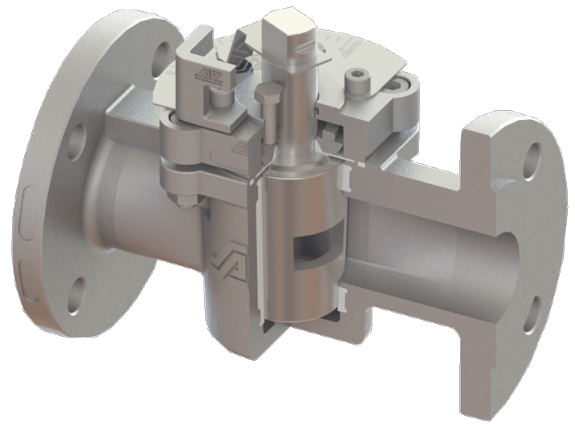

Design Features

Design Characteristics


- different KVS values
- individual control characteristics
- free passage possible with open valve
- equal percentage or linear characteristic line
- cost-effective automation
- readily reproducible control position

The construction of the control valves Type RH is based on our standard cavity-free plug valve with PTFE-sleeve. A wide range of materials for housings, plugs, as well as for sleeves or linings are available for different areas of application. If required, the control valves can also be supplied with a heating jacket.



PT-Diagram

General Pressure-Temperature-Diagram

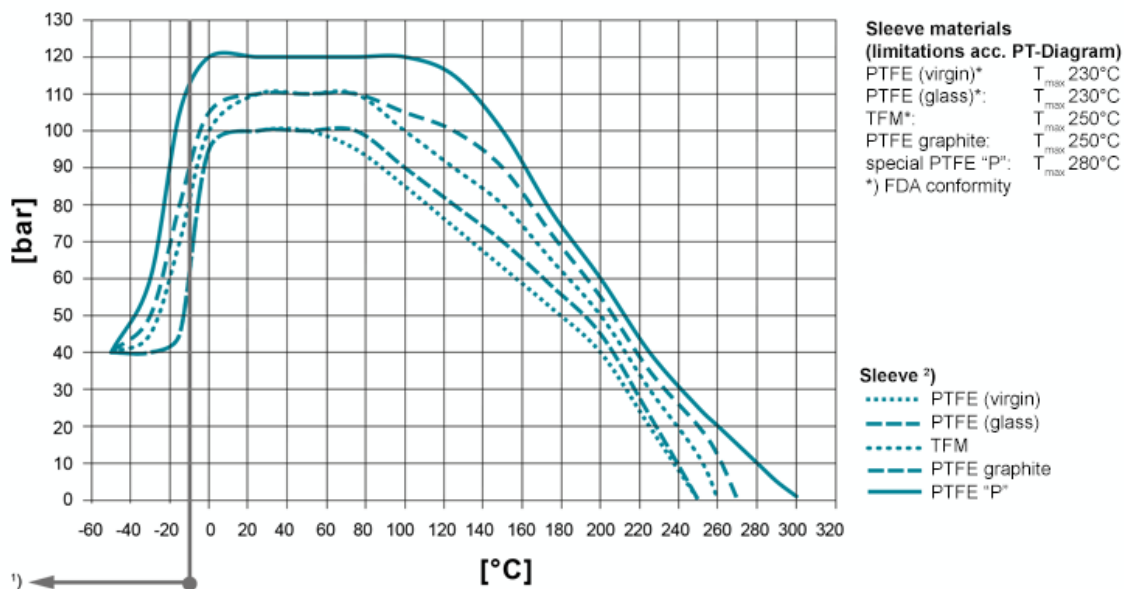

Operating temperatures < -30°C and > 220 °C have to be checked and approved by AZ according to the operating conditions.

Besides the P/T value of the sleeve the limitations of the valve bodies also have to be considered. Please refer to the EN 12516-1 resp. ASME B16.34 in order to choose a proper pressure rating (PN/class). The shown values refer to austenitic stainless steel 1.4408 (A351 Gr. CF8M).

- 1) For operating temperatures below -10°C low temperature / austenitic steels are required.
- 2) Sleeve: There are different sleeve materials / compounds available.

Materials

Standard body materials

- Carbon Steel 1.0619, ASTM A216 WCB
- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8
- Unalloyed stainless steel casting (low Temp.) 1.1138, LCC/LCB/A352

Standard plug materials

- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8

Special materials

- Ductile cast iron ENJS 1049, ASTM Gr 60-40-18 / A395
- Alloy
- Monel
- Nickel
- Zirconium
- Titan
- Tantal
- other materials on request

Sealing Systems

Standard sealing for all major applications;
Tmax 230°C

Type STD

[read more \[...\]](#)

Firesafe sealing (API 607) with graphite
packing for additional
stem sealing; Tmax 230°C

Type FS

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating
temperatures
with 3x graphite packing (adjustable) for additional
stem sealing; Tmax 280°C

Type FSN

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating
temperatures
with 3x graphite packing (live loaded disc springs) for
additional
stem sealing; Tmax 280°C

Type FSN-SL

[read more \[...\]](#)

Chemical sealing to prevent fugitive emission of aggressive and toxic media with PTFE packing for additional stem sealing;
 $T_{\max} 230^{\circ}\text{C}$

Type CA

[read more \[...\]](#)

Chemical safety sealing for fluctuating temperatures with 3x PTFE packing (adjustment) for additional stem sealing;
 $T_{\max} 230^{\circ}\text{C}$

Type CASN



[read more \[...\]](#)

Chemical safety sealing for fluctuation temperatures with 3x PTFE packing (live loaded disc springs) for additional stem sealing; $T_{\max} 230^{\circ}\text{C}$

Type CASN-SL

[read more \[...\]](#)

Port Forms

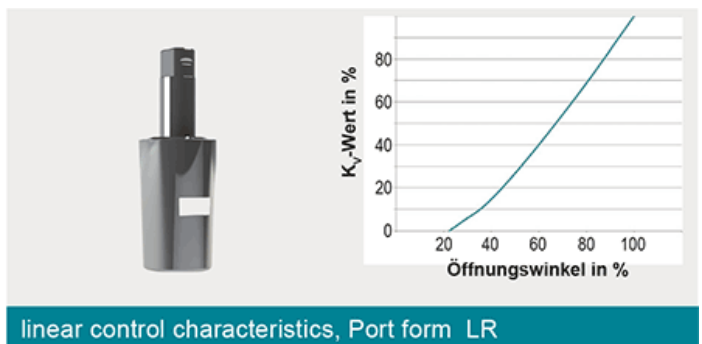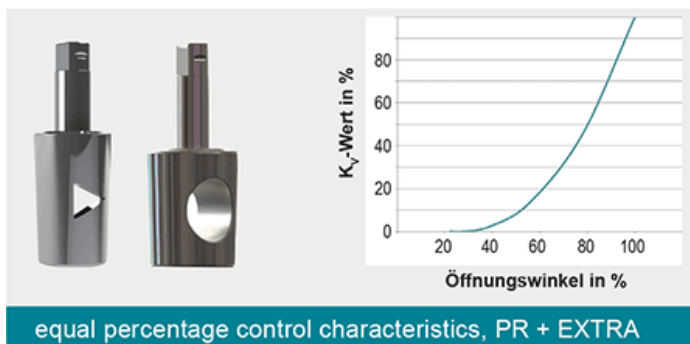

As standard, there are ten plugs forms available per valve size, consisting of five linear and five equal percentage control characteristics. Type “EXTRA” full bore plug valves with equal percentage control characteristics are recommended for very large flow rates (only RH and RH-S types).

Furthermore, bespoke plug forms can be calculated and designed according to customer-specific requirements that combine, for example, control properties and free passage.

Characteristics

Type RH, linear control characteristics



Type RH-LR

Plug: linear control characteristics



| ASME / DIN EN | DIN | NPS | LR I K_{vs} value [m³/h] | LR II K_{vs} value [m³/h] | LR III K_{vs} value [m³/h] | LR IV K_{vs} value [m³/h] | LR V K_{vs} value [m³/h] |
|---------------|---------|-----|-------------------------------|--------------------------------|---------------------------------|--------------------------------|-------------------------------|
| | DN 15 | ½ | 0,9 | 1,9 | 3,1 | 4,7 | 6,5 |
| | DN 20 | ¾ | 0,5 | 1,5 | 2,8 | 4,3 | 5,3 |
| | DN 25 | 1 | 1,0 | 1,9 | 3,1 | 5,6 | 10 |
| | DN 32 | 1 ¼ | 1,8 | 3,6 | 5,8 | 11 | 21 |
| | DN 40 | 1 ½ | 3,0 | 6,0 | 9,3 | 18 | 36 |
| | DN 50 | 2 | 5,5 | 12 | 27 | 37 | 74 |
| | DN 65 | 2 ½ | 9,6 | 21 | 32 | 62 | 111 |
| | DN 80 | 3 | 9,2 | 19 | 28 | 54 | 97 |
| | DN 100 | 4 | 9,1 | 19 | 28 | 49 | 81 |
| | DN 100S | 4S | 23 | 48 | 75 | 160 | 358 |
| | DN 125 | 5 | 32 | 67 | 105 | 209 | 367 |
| | DN 150 | 6 | 32 | 64 | 101 | 182 | 315 |
| | DN 200 | 8 | 63 | 129 | 207 | 380 | 666 |

Type RH, equal percentage control characteristics



Type RH-PR

Plug: equal percentage control characteristics



| ASME / DIN EN | DIN | NPS | PR I K_{vs} value [m³/h] | PR II K_{vs} value [m³/h] | PR III K_{vs} value [m³/h] | PR IV K_{vs} value [m³/h] | PR V K_{vs} value [m³/h] | EXTRA K_{vs} value [m³/h] |
|---------------|---------|-----|-------------------------------|--------------------------------|---------------------------------|--------------------------------|-------------------------------|--------------------------------|
| | DN 15 | ½ | 0,7 | 1,4 | 2,2 | 3,1 | 4,9 | 19 |
| | DN 20 | ¾ | 0,4 | 1,1 | 1,8 | 2,6 | 4,6 | 36 |
| | DN 25 | 1 | 0,9 | 2,0 | 3,1 | 4,4 | 6,7 | 70 |
| | DN 32 | 1 ¼ | 1,7 | 3,7 | 5,9 | 8,8 | 12 | 113 |
| | DN 40 | 1 ½ | 3,0 | 6,0 | 9,5 | 14 | 19 | 193 |
| | DN 50 | 2 | 5,4 | 11 | 18 | 26 | 30 | 323 |
| | DN 65 | 2 ½ | 9,3 | 21 | 32 | 46 | 68 | 569 |
| | DN 80 | 3 | 8,8 | 18 | 29 | 42 | 58 | 947 |
| | DN 100 | 4 | 8,7 | 18 | 28 | 39 | 56 | 1446 |
| | DN 100S | 4S | 22 | 47 | 76 | 104 | 124 | - |
| | DN 125 | 5 | 32 | 65 | 104 | 151 | 198 | - |
| | DN 150 | 6 | 31 | 63 | 100 | 144 | 193 | 3338 |
| | DN 200 | 8 | 62 | 128 | 205 | 290 | 368 | 6362 |

Model structure

The data was determined by flow simulation and based on the VDI/VDE 2173 with a permissible deviation of +/- 10% (medium = water 20°C, pressure loss $\Delta p = 1$ bar).

Definition Kvs

The Kvs value designates the maximum possible throughput for a valve with a 100% opening

Definition Kv


The flow coefficient Kv [m^3/h] is a specific volume flow for the following conditions:

- The pressure loss (Δp) via the valve is 10^5 Pa (1 bar)
- The medium is water with a temperature between 278 K and 315 K (5°C to 40°C)

Definition Cv

The flow coefficient Cv is a valve flow coefficient that does not correspond to S.I. units. It represents the number of U.S. gallons of water which flow through a valve with a pressure loss of 1 psi (68.95 mbar) at a temperature of 40°F to 100°F (4°C to 38°C) within a minute. $Cv = Kv/0,865$

Actuation

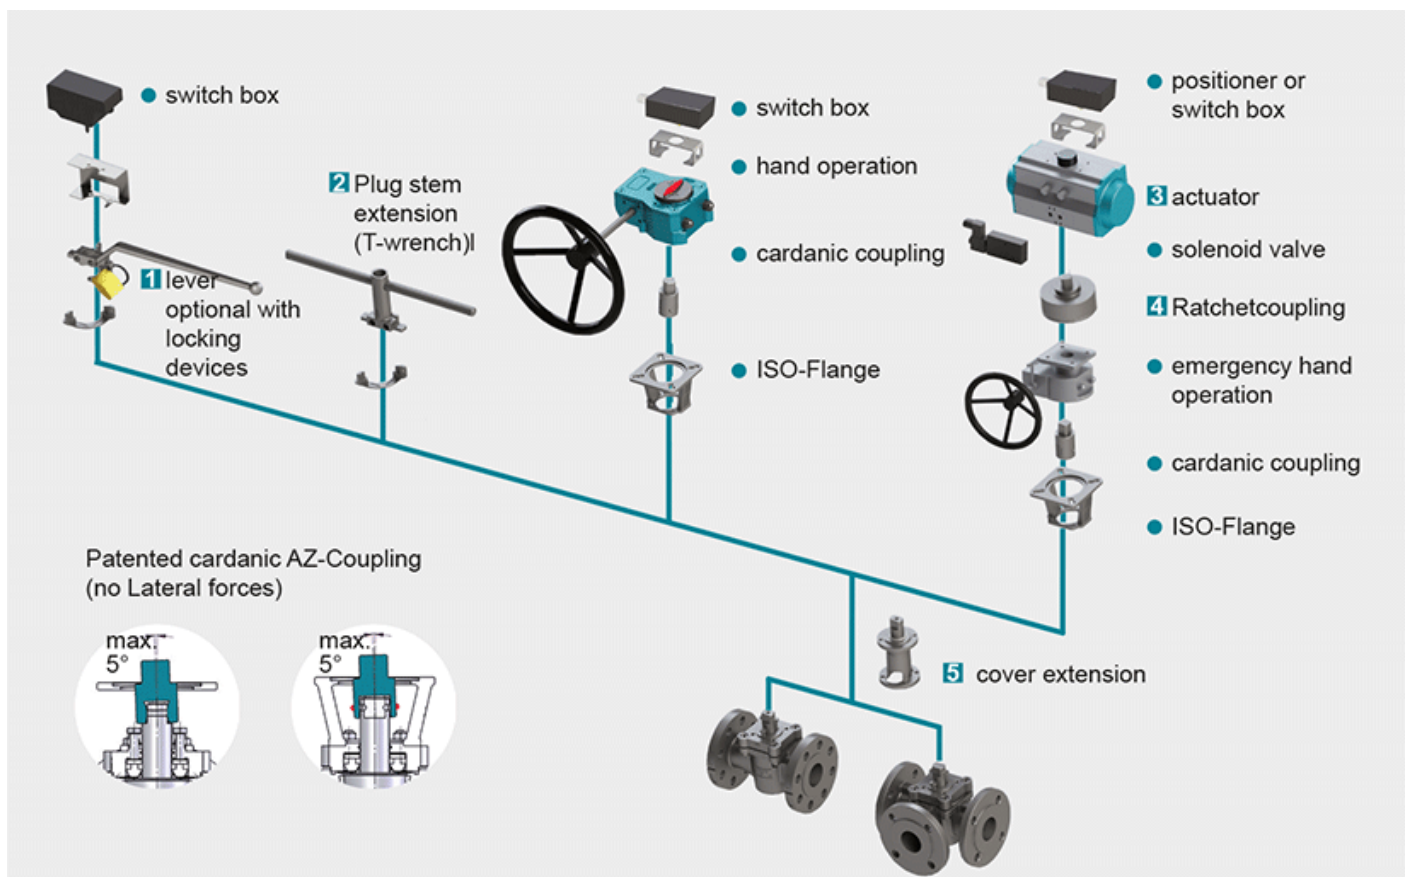

1 Locking Devices

Pilot valve combinations, pad lock eyelets, linear key conception, indexing plunger arrestor.

read more [...]

2 Plug stem extension

Solid construction in stainless steel with T-wrench, Standard extension 100 mm or 150 mm, non standard lengths are available on request

[read more \[...\]](#)

3 Actuators

Actuators for mounting-flange acc. to DIN ISO 5211

[read more \[...\]](#)

NEW: Pneumatic actuator AIR GEAR for plug valves with high torque =150.000 Nm

[read more \[...\]](#)

4 Ratched coupling

To use on multiport valves with standard 90° actuator for bigger switchpositions than 90°

[read more \[...\]](#)

5 Cover extension

Solid construction in stainless steel, Standard extension 100 mm or 150 mm high, non standard lengths are available on request . Hexagonal bolts on adjustment ring freely accessible. Note: Don't use with sealing FSN/FSN-SL and CASN/CASN-SL

[read more \[...\]](#)