

SAVA

Special cross-over combinations for Safety (Relief) valves

DIN: 25E – 500E / PN 10 – 40

ASME: NPS 1"E – 20"E / class 150 300

PT range: $-30 < T < 230/280^{\circ}\text{C}$, vacuum 10-8 mbar





Design Features

Design Characteristics


- full-flow, round bore
- cavity free (no medium contact of sealing surfaces)
- tight for years (DIN EN 12266-1)
- safe exchange of safety valves
- transflow during cross-over action
- operation errors impossible design-wise
- safe backflow of blow off capacity
- economic combination of different valve sizes
- TÜV approved

The basic principle of the safety valve exists therein, that dependent on the construction, a least cross section (A_{min}) is guaranteed during the cross-over phase from safety valve I to safety valve II. Therefore a minimal flow (protection of the vessel) is always given.

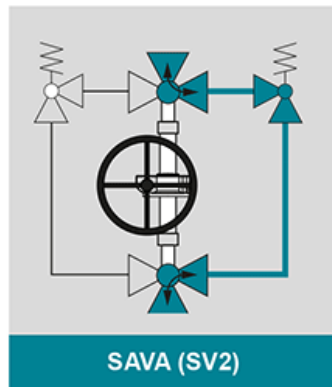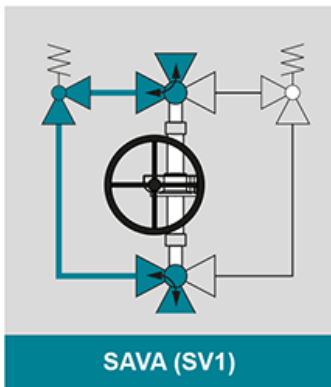

PT-Diagram

General Pressure-Temperature-Diagram

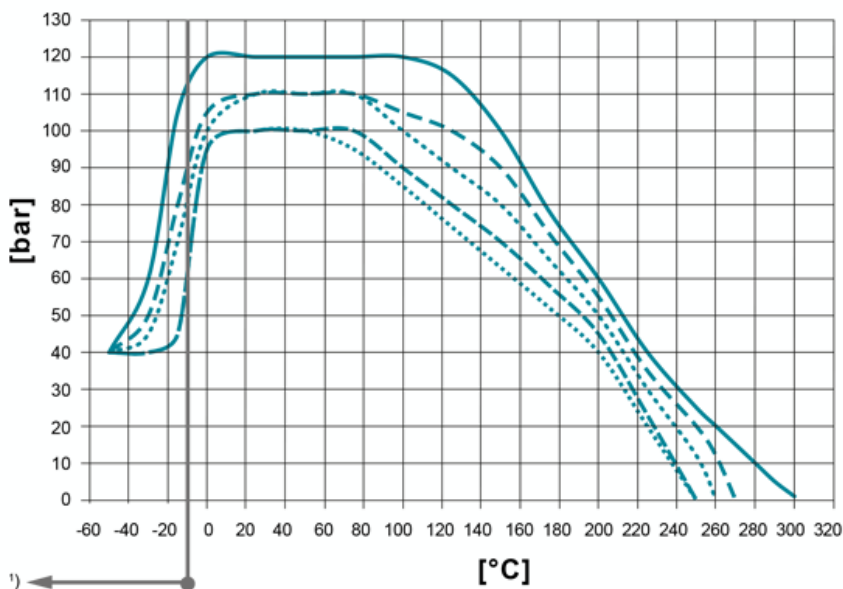

Sleeve materials
(limitations acc. PT-Diagram)

PTFE (virgin)*	T _{max} 230°C
PTFE (glass)*	T _{max} 230°C
TFM*	T _{max} 250°C
PTFE graphite	T _{max} 250°C
special PTFE "P"	T _{max} 280°C

*) FDA conformity

Sleeve *)

- PTFE (virgin)
- PTFE (glass)
- TFM
- PTFE graphite
- PTFE "P"

Operating temperatures < -30°C and > 220 °C have to be checked and approved by AZ according to the operating conditions.

Besides the P/T value of the sleeve the limitations of the valve bodies also have to be considered. Please refer to the EN 12516-1 resp. ASME B16.34 in order to choose a proper pressure rating (PN/class). The shown values refer to austenitic stainless steel 1.4408 (A351 Gr. CF8M).

- 1) For operating temperatures below -10°C low temperature / austenitic steels are required.
- 2) Sleeve: There are different sleeve materials / compounds available.

Materials

Standard body materials

- Carbon Steel 1.0619, ASTM A216 WCB
- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8
- Unalloyed stainless steel casting (low Temp.) 1.1138, LCC/LCB/A352

Standard plug materials

- Stainless Steel 1.4408, ASTM A351 CF8M
- Stainless Steel 1.4308, ASTM A351 CF8

Special materials

- Alloy
- Monel
- Nickel
- Zirconium
- Titan
- Tantal
- other materials on request

Sealing Systems

Standard sealing for all major applications;
Tmax 230°C

Type STD

[read more \[...\]](#)

Firesafe sealing (API 607) with graphite
packing for additional
stem sealing; Tmax 230°C

Type FS

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating
temperatures
with 3x graphite packing (adjustable) for additional
stem sealing; Tmax 280°C

Type FSN

[read more \[...\]](#)

Firesafe safety sealing (API 607) for fluctuating
temperatures
with 3x graphite packing (live loaded disc springs) for
additional
stem sealing; Tmax 280°C

Type FSN-SL

[read more \[...\]](#)

Chemical sealing to prevent fugitive emission of aggressive and toxic media with PTFE packing for additional stem sealing;

T_{max} 230°C

Type CA

[read more \[...\]](#)

Chemical safety sealing for fluctuating temperatures with 3x PTFE packing (adjustment) for additional stem sealing;

Tmax 230°C

Type CASN

[read more \[...\]](#)

Chemical safety sealing for fluctuation temperatures with 3x PTFE packing (live loaded disc springs) for additional stem sealing; Tmax 230°C

Type CASN-SL

[read more \[...\]](#)

Port Forms



on request

Dimensions

F-3-E-W: $\zeta = 1,14$
 F-3-E-S: $\zeta = 1,29$

F-3-E-S: $\zeta = 1,29$

(measured ζ -values,
 valid for all nominal sizes)

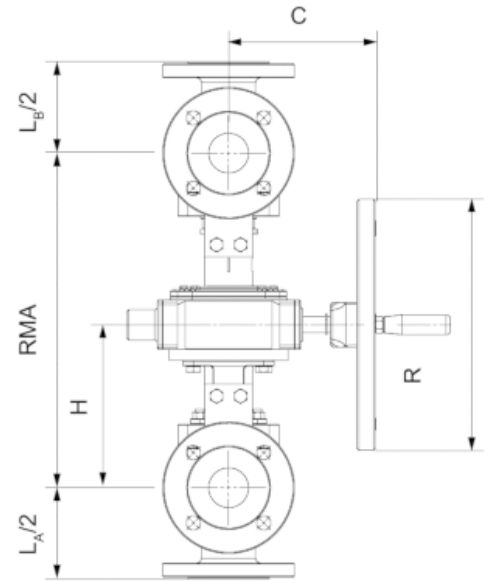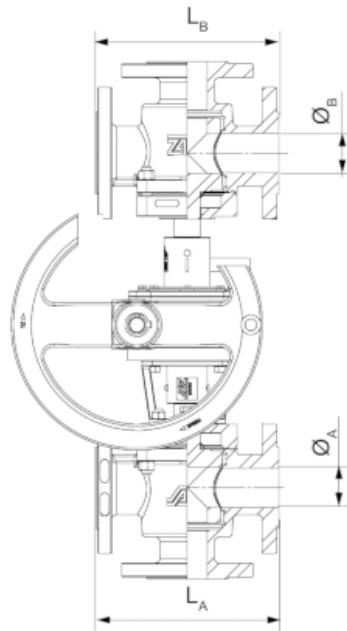

Class 150 ³⁾	PN10 - PN 40 ³⁾		A _{min}	RMA _{min} ¹⁾ [mm]		C	H	L _A ³⁾	L _A /2	L _B ⁵⁾	L _B /2	R		
	Ø _A [NPS]	Ø _B [NPS]	Ø _A [DN]	Ø _B [DN]	[mm ²]	ISO-EXTRA	EXTRA	[mm]	[mm]	[mm]	[mm]	[mm]		
		1E		25E ⁴⁾		320		132	180	160	80	160	80	160
1E	1½E	25 ⁴⁾	40E	50E	225	330		165	188	200	100	200	100	160
	2E		50E	65E		340		170	205	160	80	230	115	315
	1½E		40E	50E		360		165	188	200	100	200	100	160
1½E	2E	40E	50E	65E	708	360		170	205	200	100	230	115	315
	3E		65E	80E		390		170	215	200	100	310	155	315
	2E		50E	65E		400		170	205	230	115	230	115	315
2E	2½E	50E	65E	80E	1296	410		170	215	230	115	290	145	315
	3E		80E	100E		430		170	235	230	115	310	155	400
	3E		80E	100E		460		170	235	310	155	310	155	400
3E	4E	80E	100E	150E	3754	530		299	290	310	155	350	175	400
	6E		150E	200E		480		324	342	350	175	480	240	500
	4E		100E	150E		590		299	290	310	155	350	175	400
4E	6E	100E	150E	200E	5184	640 (F25)		324	342	350	175	480	240	500
	8E		200E	250E		680 (F30)		380	381	480	240	600	300	400
	6E		150E	200E		720 (F30)		324	342	480	240	480	240	500
6E	8E	150E	200E	250E	14386	730 (F30)		380	381	480	240	600	300	400
	8E		200E	250E		760 (F30)		380	381	600	300	600	300	400
8E	10E	200E	250E	300E ²⁾	25833	830 (F35)		510	434	600	300	730	365	800
	10E		250E	300E ²⁾		850 (F35)		510	434	730	365	730	365	800
10E	12E	250E	300E ²⁾	300E ²⁾	42102					730	365	850	425	
12E	12E	300E ²⁾	300E ²⁾	300E ²⁾						850	425	850	425	

¹⁾ larger pipe centre line (RMA) on request

²⁾ All details for PN10 - PN 40 and Class 150, higher sizes or ratings on request


³⁾ Flanges acc. to ASME, Class 300/600 or others on request

⁴⁾ also available with T-wrench

⁵⁾ F/F dimension acc. to DIN 3202 / EN 558-1

For geometric reasons, threads are used in the flange bores in a few cases

Actuation

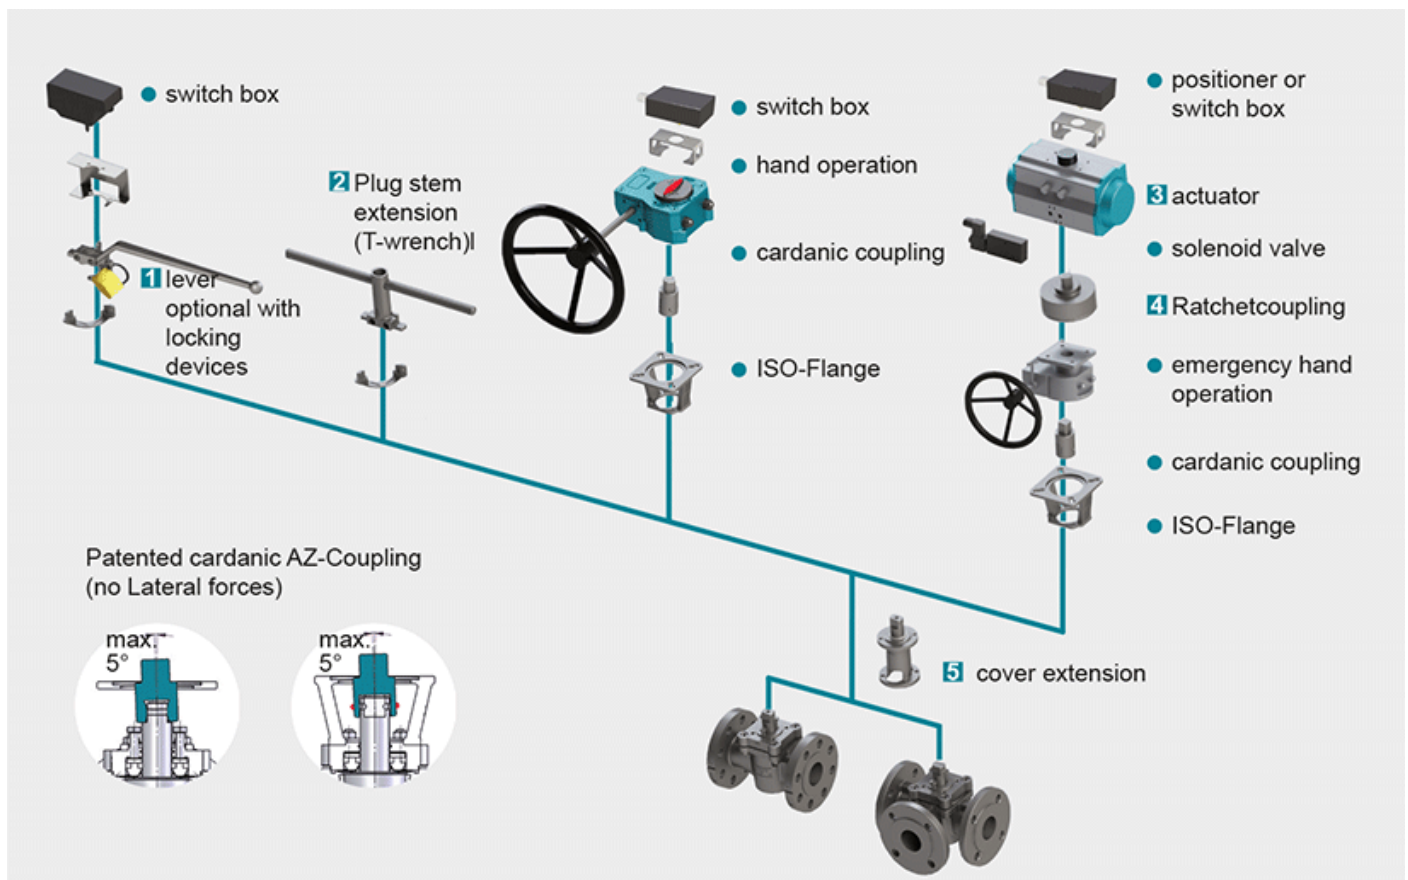

1 Locking Devices

Pilot valve combinations, pad lock eyelets, linear key conception, indexing plunger arrestor.
read more [...]

2 Plug stem extension

Solid construction in stainless steel with T-wrench, Standard extension 100 mm or 150 mm, non standard lengths are available on request
read more [...]

3 Actuators

Actuators for mounting-flange acc. to DIN ISO 5211
read more [...]

NEW: Pneumatic actuator AIR GEAR for plug valves with high torque =150.000 Nm
read more [...]

4 Ratched coupling

To usw on multiport valves with standard 90° actuator for bigger switchpositions than 90°
read more [...]

5 Cover extension

Solid construction in stainless steel, Standard extension 100 mm or 150 mm high, non standard lengths are available on request . Hexagonal bolts on adjustment ring freely accessible. Note: Don't use with sealing

FSN/FSN-SL and CASN/CASN-SL
read more [...]