


# ISO-STANDARD A CA

**Plug valve with chemical-resistant, vacuum-proof lining, with ISO top flange, sealing system Type CA**

DIN-EN: DN 15 – 600 / PN 10 – 40

ASME: NPS ½" – 24" / class 150 – 300

PT range:  $-30 < T < 210^{\circ}\text{C}$ , vacuum tight

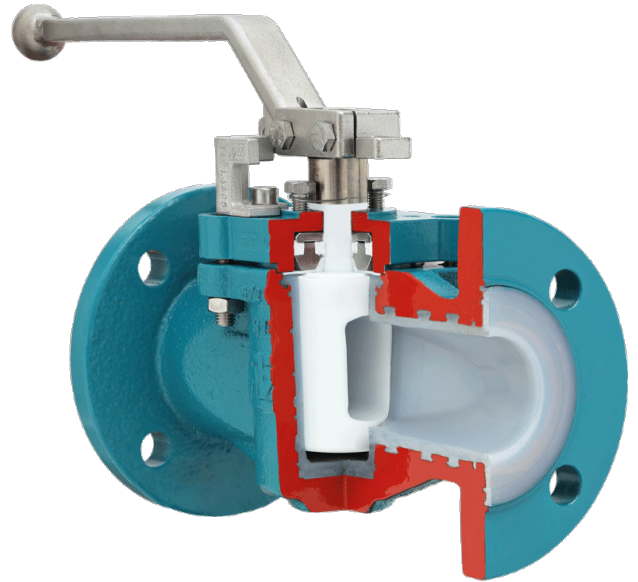


## Design Features

### Design Characteristics

- free of cavities
- maintenance free – self lubricating
- mounting-flange for actuators acc. to DIN ISO 5211
- easy accessible adjustment of the plug, even with mounted actuator
- with chemical resistant lining – thickness min. 3 mm vacuum tight
- fugitive emission resp. clean air act certified (TA – Luft 2002 approval)
- Directive 2014/68/EU
- FDA conformity

## PT-Diagramm

General Pressure-Temperature-Diagram

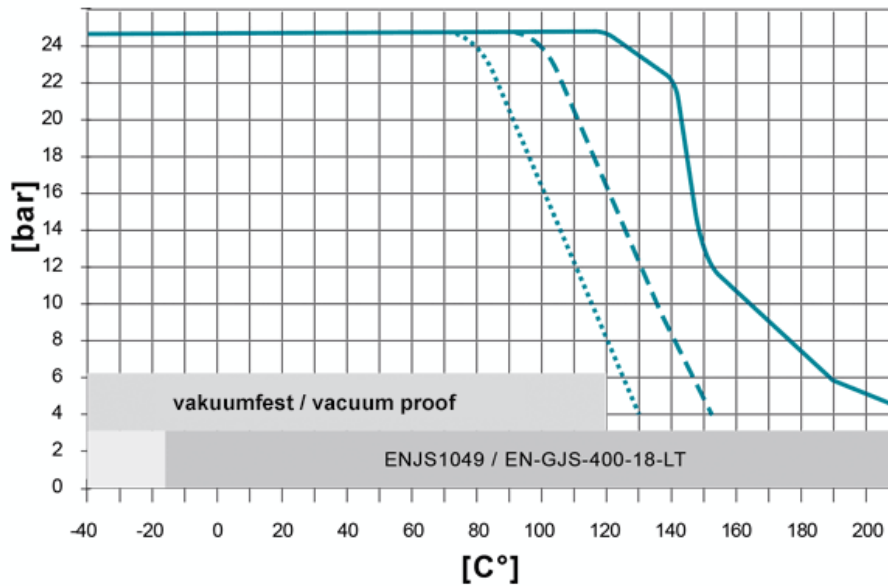

Lining materials		
Body	Plug	Tmax
PFA	PTFE	210°C
PFA/FEP	PFA	150°C
PFA	Special material	210°C
PFA cond.	PFA conductive	125°C

Standard lining materials::  
PFA (body) and PTFE (plug)

Lining materials Body / Plug	
—	PFA or FEP / PTFE
- - -	PFA / PFA
.....	PFA / FEP

The specified values depend on the respective application (medium). Operating temperatures under -20°C only with body material 1.4408 or low-temperature steel. High pressure resistance / temperature resistance on request, e.g. PN 40.

Sleeve: There are different sleeve materials / compounds available.

## Materials

### Standard body materials

- Ductile cast iron ENJS 1049, ASTM Gr 60-40-18 / A395

### Standard plug materials

- Stainless Steel 1.4308, ASTM A351 CF8
- Ductile cast iron ENJS 1049, ASTM Gr 60-40-18 / A395

### Special materials

- Carbon Steel 1.0619, ASTM A216 WCB
- Stainless Steel 1.4408, ASTM A351 CF8M
- Unalloyed stainless steel casting (low Temp.) 1.1138, LCC/LCB/A352

### Lining materials

- Body: PFA, PFA-conductive, FEP
- Plug: PTFE, PFA, PFA-conductive, FEP

## Sealing Systems

Chemical sealing to prevent fugitive emission of aggressive and toxic media with PTFE packing for additional stem sealing;  $T_{\text{max}}$  230°C

### Type CA







[read more \[...\]](#)







## Port Forms



AZ plug valves are fitted with cast, rust proof position indicators. The position indicator is securely welded to the lever to prevent it from working loose.





				
Form D	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°
				
Form T4	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°

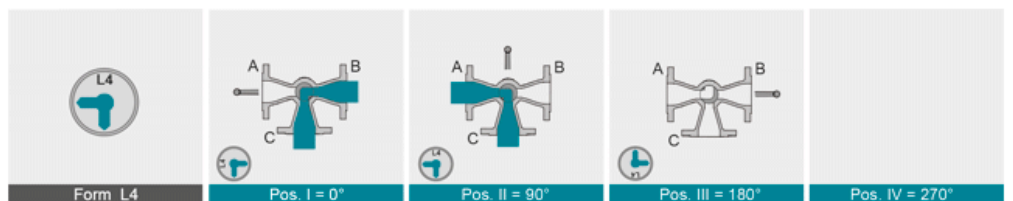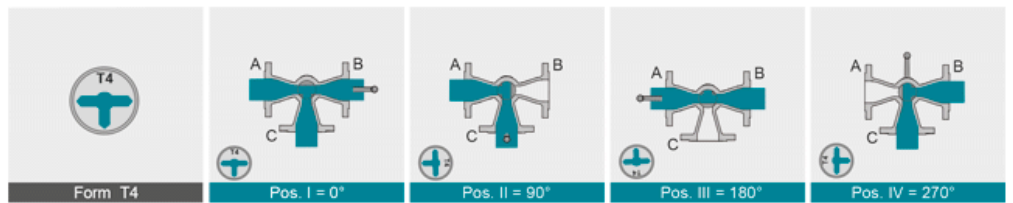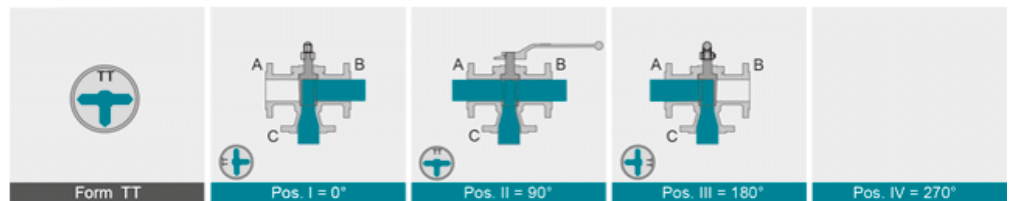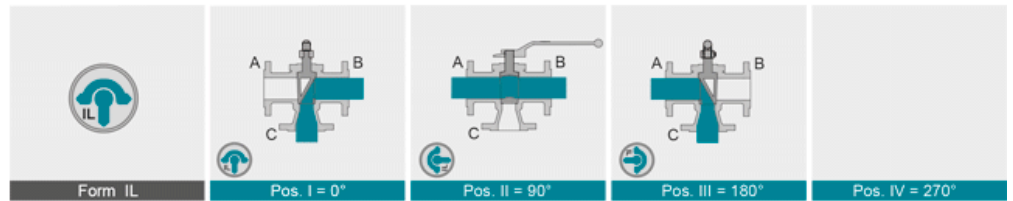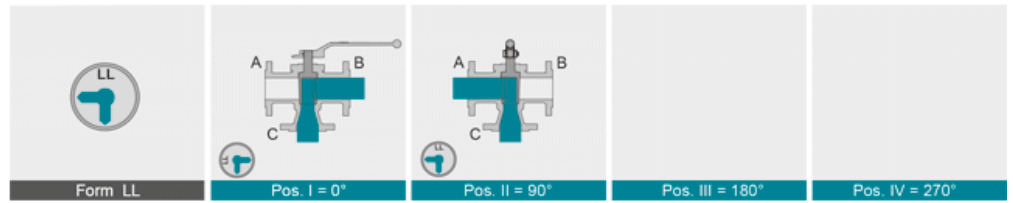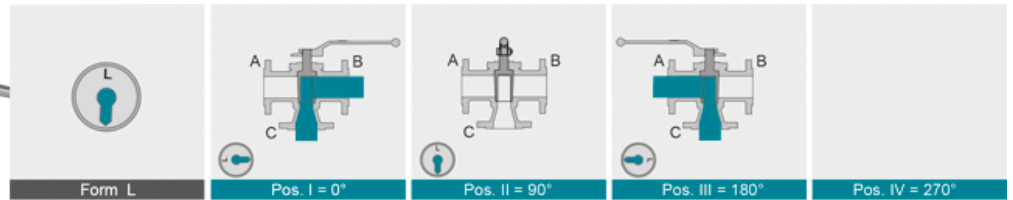

## Dimensions

AZ ISO bracket  
for actuator

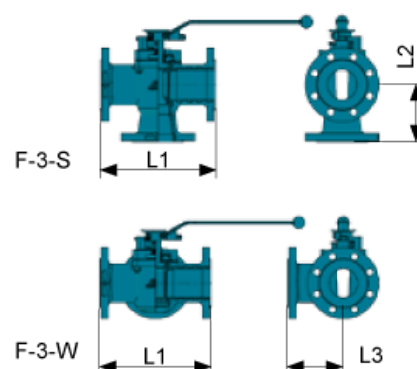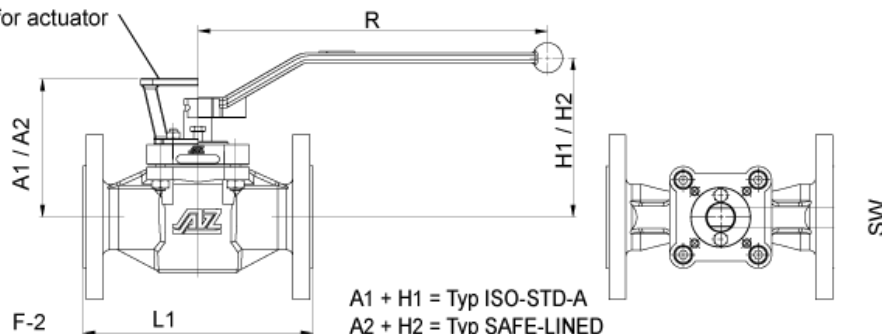

DIN EN 1092/1 / 558-1

ASME B 16.5 / 16.10


DN	PN	L1 [mm]	L2 [mm]	L3 [mm]	A [mm]	H1 [mm]	H2 [mm]	R1 [mm]	H1 [mm]	DIN-ISO bracket	SW [mm]	torque.* [Nm]	weight [kg]	K <sub>v</sub> value [m³/h]	C <sub>v</sub> value [US.gal/min]
15	10-40	130	*	*	88	98	**	200	**	F05	11	40/--	3,8	7,1	8,2
20	10-40	150	75	75	88	98	**	200	**	F05	11	40/--	4,0	5,8	6,7
25	10-40	160	80	80	94	110	**	200	**	F07	14	90/60	6,5	32	37
32	10-40	180	90	90	102	117	**	320	**	F07	14	90/60	7,5	51	59
40	10-40	200	100	100	109	124	**	320	**	F07	14	160/80	10	79	92
50	10-40	230	115	115	139	160	**	420	**	F07	19	250/120	12	127	147
65	10-16 25-40	290	*	*	158	170	**	600	**	F10	22	400/260	20	179	207
80	10-40	310	155	155	158	170	**	600	**	F10	22	400/260	20	246	285
100	10-16 25-40	350	175	175	158	170	**	600	**	F10	22	400/260	30	203	203
NPS		L1 [mm]	L2 [mm]	L3 [mm]	A [mm]	H1 [mm]	H2 [mm]	R1 [mm]	H1 [mm]	DIN-ISO bracket	SW [mm]	torque.* [Nm]	weight [kg]	K <sub>v</sub> value [m³/h]	C <sub>v</sub> value [US.gal/min]
½	150	108	**	**	88	110	**	200	**	F05	11	40/--	2,7	7,7	9,0
	300	140	**	**									3,8		
¾	150	117	64	64	88	110	**	200	**	F05	11	40/--	3,2	6,4	7,4
	300	152	83	83									4,3		
1	150	127	**	**	94	110	**	200	**	F05	11	90/60	3,5	35	41
	300	165	**	**							14		6,0		
1¼	150	140	89	89	102			320		F07	14	90/60	7,5	56	65
	300	178	**	**									8,5		
1½	150	165	**	**	109	124	**	320	**	F07	14	160/80	9	87	101
	300	190	**	**									10		
2	150	178	**	**	139	160	**	420	**	F07	19	250/120	13	140	162
	300	216	**	**									16		
2½	150	190	**	**	158			600		F10	22	400/260	16	197	228
	300	241	**	**									19		
3	150	203	**	**	158	170	**	600	**	F10	22	400/260	18	271	314
	300	282	**	**									23		
4	150	229	154	**	158	170	**	600	**	F10	22	400/260	26	223	223
	300	305	**	**									31		

ISO flange instructions, weights and KVS values for straight-way valves

\*) Maximum breakaway torque  $M_{d_{breakaway}} [Nm]$  for F-2 and F-3-S ISO standard A depending on material combinations (PFA+PFA / PFA+PT-FE). All data incl. 100% safety factor Breakaway torques for valves - types F-4 and F-3-W on request

\*\*) on request

Due to geometric reasons partly threaded holes in flange drilling

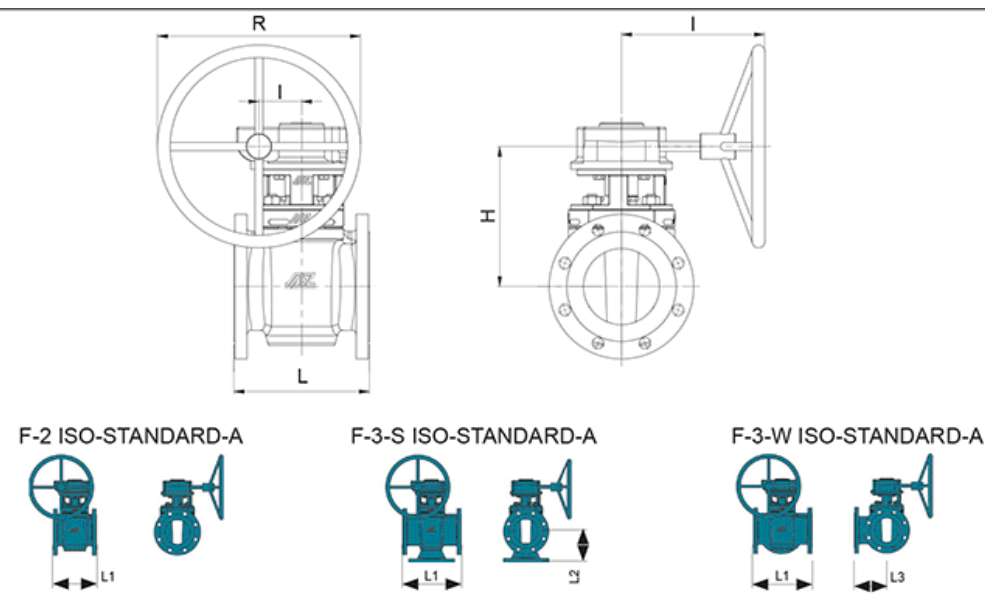																
DIN EN 1092/1 / 588-1	DN	PN	L1	L2	L3	E	R	H	I	Gear	ISO 5211 flange	dihe- dron	torque* [Nm]	weight [kg]	K <sub>vs</sub> -value [m³/h]	C <sub>v</sub> -value [US.gal/min]
	100S	10-16 25-40	350	**	**	84	400	230	290	Q1500-S	F16	36	600/350	32 32	447	517
	125	10-16 25-40	325	**	**	84	400	260	290	Q1500-S	F16	36	1200/900	74 78	358	414
	150	10-16 25-40	350	200	200	84	400	265	290	Q1500-S	F16	36	1200/900	85 87	822	951
	200	10-16 25 40	400	**	**	96,5	600	320	350	Q2000-S	F16	36	2600/--	119 131	1727	1997
	250	10 16 25 40	450	**	**	117,5	600	352	465	Q5000-S	F16	36	3200/--	195 259	2052	2373
	300	10 16 25 40	500	**	**	117,5	600	340	465	Q5000-S	F16	36	3200/--	253 274	1707	1973
	NPS	Class	L1	L2	L3	E	R	H	I	Gear	ISO 5211 flange	dihe- dron	torque* [Nm]	weight [kg]	K <sub>vs</sub> -value [m³/h]	C <sub>v</sub> -value [US.gal/min]
ASME B 16.5 / 16.10	4"S	150 300	254 325	154 **	154 **	84	500	230	328	Q1500-S	F16	27	600/350	27 32	492	569
	5"	150 300	254 325	**	**	118	500	260	363	Q1500-S	F16	27	1200/900	61 78	394	455
	6"	150 300	267 403	**	**	118	500	265	363	Q1500-S	F16	27	1200/900	66 77	904	1046
	8"	150 300	292 419	**	**	138	500	320	440	Q2000-S	F16	36	2600/--	103 138	1900	2197
	10"	150 300	330 457	**	**	138	500	352	440	Q5000-S	F16	36	3200/--	140 176	2257	2610
	12"	150 300	356 502	**	**	138	500	340	440	Q5000-S	F16	36	3900/--	168 187	1877	2170

For geometric reasons, threads are used in the flange bores in a few cases

ISO flange instructions, weights and Kvs values for straight-way valves

\*) Maxium breakaway torque MD breakaway [Nm] for F2 and F3S ISO STANDARD A depending on material combinations (PFA+PFA / PFA+PTFE). All data incl. 100% safety factor. Breakaway torques for valves – tapes F-4 and F3W on request


\*\*) on request

For geometric reasons, threads are used in the flange bores in a few cases

ISO flange instructions, weights and Kvs values for straight-way valves

\*) Maxium breakaway torque MD breakaway [Nm] for F2 and F3S ISO STANDARD A depending on material combinations (PFA+PFA / PFA+PTFE). All data incl. 100% safety factor. Breakaway torques for valves – tapes F-4 and F3W on request

## Actuation

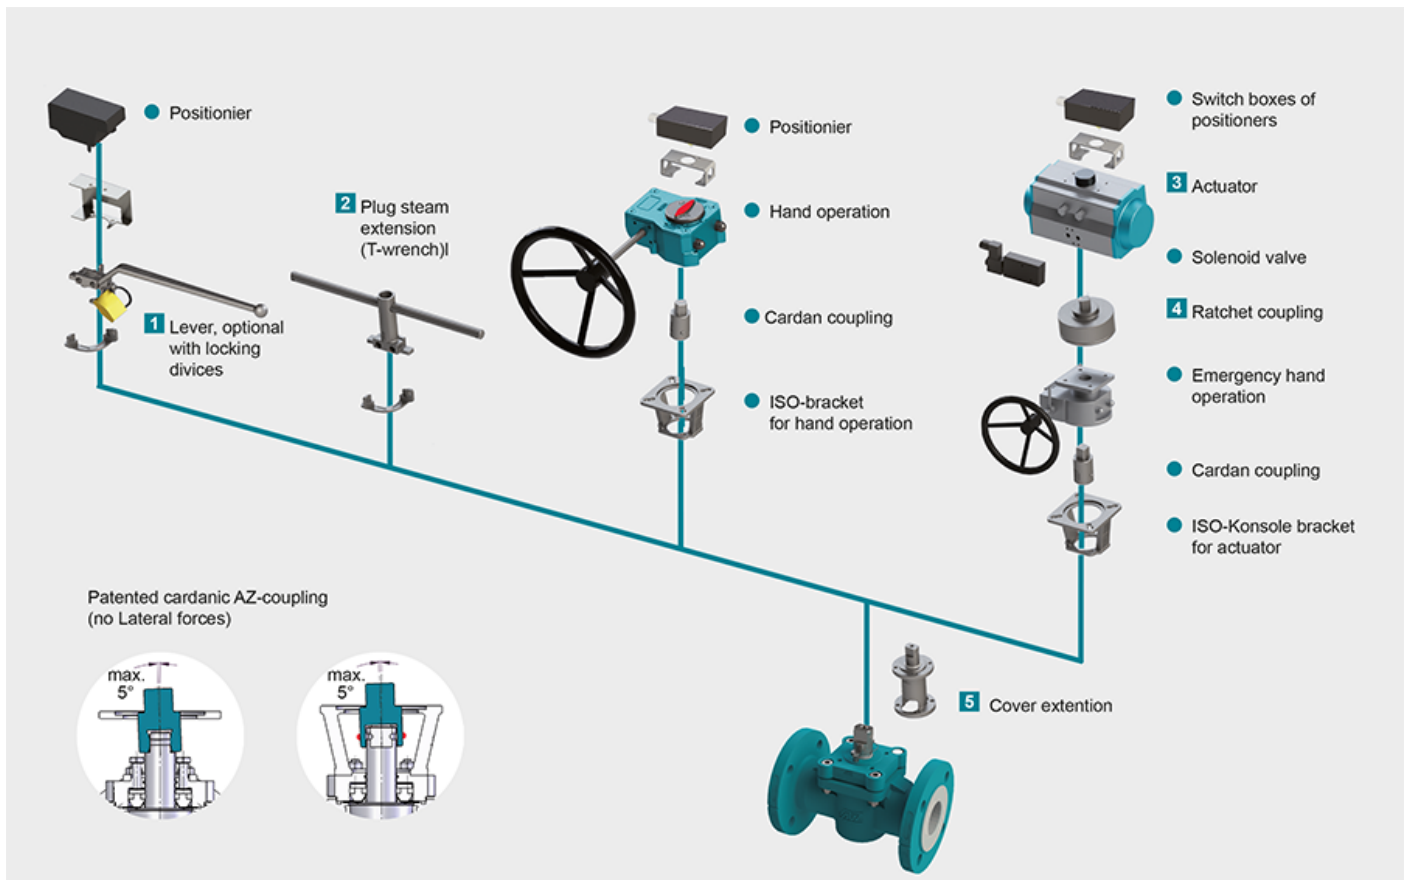

### 1 Locking Devices

Pilot valve combinations, pad lock eyelets, linear key conception, indexing plunger arrestor.  
[read more \[...\]](#)

### 2 Plug stem extension

Solid construction in stainless steel with T-wrench, Standard extension 100 mm or 150 mm, non standard lengths are available on request  
[read more \[...\]](#)

### 3 Actuators

Actuators for mounting-flange acc. to DIN ISO 5211  
[read more \[...\]](#)

NEW: Pneumatic actuator AIR GEAR for plug valves with high torque =150.000 Nm  
[read more \[...\]](#)

### 4 Ratched coupling

To usw on multiport valves with standard 90° actuator for bigger switchpositions than 90°  
[read more \[...\]](#)

### 5 Cover extension

Solid construction in stainless steel, Standard extension 100 mm or 150 mm high, non standard lengths are available on request . Hexagonal bolts on adjustment ring freely accessible. Note: Don't use with sealing

FSN/FSN-SL and CASN/CASN-SL  
[read more \[...\]](#)