


# GLOBUS

## Ball check valve with FEP/PFA lining, with or without sightglass

DIN-EN: DN 15 - 250 / PN 10 - 40

ASME: NPS 1" - 4" / class 150

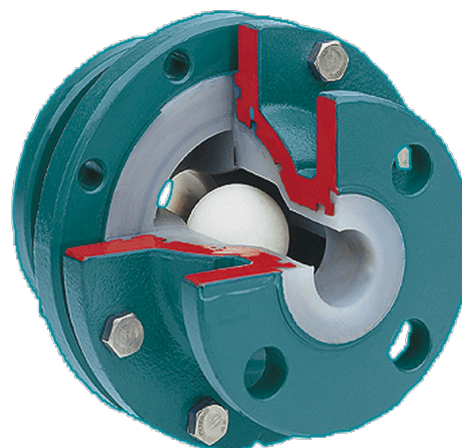

## Design Features

### Design Characteristics

- temperatur range up to 150°C (Type GLOBUS) / 130°C (Type GLOBUS-SG)
- Borosilikat sightglass for visual function control (Type GLOBUS-SG)
- FFEP or PFA lining (3 m min.)

### Condition:

After the check valve in flow direction the pipe-DN must correspond to the check valve-DN. Recommendation for vertical type: DELTA. When vertically installed ( $=0^\circ$ ) resp. (up to  $60^\circ$  angle) ball ceck valves close automatically, because ball is guided in the centre of the bore. When horizontally installed ( $=90^\circ$ ) resp. (up to  $30^\circ$ ) the valves close automatically if the back flow related water is 1,5 - 2,5 m/sec

## Materials

### Standard

- Ductile cast iron ENJS 1049, ASTM Gr 60-40-18 / A395

### Special materials

- Carbon Steel 1.0619 / ASTM A216 WCB
- Stainless steel 1.4308 / ASTM A351 CF8M
- Unalloyed stainless steel casting (low Temp.) 1.1138 / LCC/LCB / A352

### Sightglass

- Borosilikat

### Ball

- PTFE

### Lining materials

- Body: PFA, PFA-conductive, FEP

## Dimensions

	GLOBUS			GLOBUS-SG		
	DN	PN	LG	PN	$p_{max}^{**}$	L
DIN 3202/EN 558-1	15	10-40	115	16	15,8	130
	20	10-40	120	16	13,5	150
	25	10-40	125	16	11,2	160
	32	10-40	130	16	8,7	180
	40	10-40	140	16	11,9	200
	50	10-40	150	10	9,0	230
	65	10-40	170	10	7,7	290
	80	10-40	180	10	6,2	310
	100	10/16 25/40	190	10	3,8	350
	150	10/16 25/40	267	10	*	350
	200	10/16/25	292	10	*	400
250	10/16/25	330	10	*	450	
ASME B 16.5	NPS	PN	LG	PN	$p_{max}^{**}$	L
	1"	150	125	150	11,2	160
	1½"	150	*	150	*	*
	2"	150	150	150	9,0	230
	3"	150	180	150	6,2	310
	4"	150	190	150	4,8	350

Type GLOBUS (without sightglass)

Type GLOBUS-SG (with sightglass)

\* on request

Higher pressure load on request

Other DN, PN, e.g. ANSI 300 and JIS as well as other materials on request